

U.S. EPA Underground Injection Control Program

***DRAFT* PERMIT**

Class V Experimental Injection Wells

Permit No. **R9UIC-CA5-FY09-1**

Well Names:
C6-1 (injection), C6-2 (monitoring)

Birds Landing, California
Solano County

Issued to:

C6 Resources, LLC

**200 Dairy Ashford Drive, P.O. Box 576
Houston, TX 77001-0576**

Deleted: ,

Deleted: Shell Oil Company

TABLE OF CONTENTS

TABLE OF CONTENTS.....	2
------------------------	---

<u>ACRONYMS AND ABBREVIATIONS.....</u>	<u>4</u>
--	----------

PART I. AUTHORIZATION TO OPERATE AND INJECT.....	5
--	---

PART II. SPECIFIC PERMIT CONDITIONS.....	6
--	---

A. REQUIREMENTS PRIOR TO DRILLING, TESTING, CONSTRUCTING, OR OPERATING	6
--	---

1. Financial Assurance	6
------------------------------	---

2. Field Demonstrations Submittal, Notification, and Reporting.....	6
---	---

B. WELL CONSTRUCTION.....	6
---------------------------	---

1. Locations of Wells.....	6
----------------------------	---

2. Information/Data Collection and Testing during Drilling and Construction	7
---	---

3. Injection Formation Testing.....	8
-------------------------------------	---

4. Drilling, Workover, and Plugging Procedures.....	12
---	----

5. Casing and Completion Specifications	12
---	----

6. Injection Intervals	13
------------------------------	----

7. Confining Layers	14
---------------------------	----

8. Monitoring Devices	15
-----------------------------	----

9. Final Well Construction Report and Completion of Construction Notice.....	16
--	----

10. Proposed Changes and Workovers	16
--	----

C. CORRECTIVE ACTION	16
----------------------------	----

1. Annual ZEI Review.....	17
---------------------------	----

2. Implementation of Corrective Actions.....	17
--	----

D. WELL OPERATION.....	17
------------------------	----

1. Demonstrations Required Prior to Injection	17
---	----

2. Mechanical Integrity	18
-------------------------------	----

3. Injection Pressure Limitation	21
--	----

4. Injection Volume (Rate) Limitation.....	21
--	----

5. Injection Fluid Limitation	22
-------------------------------------	----

6. Tubing/Casing Annulus Requirements	22
---	----

7. Experimental Objectives – Monitoring, Analysis and Application	23
---	----

E. MONITORING, RECORDKEEPING, AND REPORTING OF RESULTS	23
--	----

1. Injection Well Monitoring Program.....	23
---	----

2. Monitoring Information	24
---------------------------------	----

3. Monitoring Devices	24
-----------------------------	----

4. Recordkeeping	27
------------------------	----

5. Reporting	28
--------------------	----

F. PLUGGING AND ABANDONMENT	30
-----------------------------------	----

1. Notice of Plugging and Abandonment.....	30
--	----

2. Plugging and Abandonment Plans	30
---	----

3. Cessation of Injection Activities	31
--	----

4. Plugging and Abandonment Report.....	31
---	----

Deleted: 4

Deleted: 5

Deleted: 5

Deleted: 5

Deleted: 5

Deleted: 5

Deleted: 5

Deleted: 6

Deleted: 7

Deleted: 11

Deleted: 11

Deleted: 12

Deleted: 13

Deleted: 14

Deleted: 15

Deleted: 15

Deleted: 15

Deleted: 16

Deleted: 16

Deleted: 16

Deleted: 16

Deleted: 16

Deleted: 17

Deleted: 20

Deleted: 20

Deleted: 20

Deleted: 21

Deleted: 21

Deleted: 22

Deleted: 22

Deleted: 23

Deleted: 23

Deleted: 26

Deleted: 26

Deleted: 28

Deleted: 28

Deleted: 28

Deleted: 29

Deleted: 29

G.	FINANCIAL RESPONSIBILITY	31
1.	Demonstration of Financial Responsibility.....	31
2.	Insolvency of Financial Institution	32
3.	Insolvency of Owner or Operator	32
H.	DURATION OF PERMIT	32
	PART III. GENERAL PERMIT CONDITIONS.....	32
A.	EFFECT OF PERMIT	32
B.	PERMIT ACTIONS.....	33
1.	Modification, Revocation, Reissuance and Termination	33
2.	Transfers	33
C.	SEVERABILITY	33
D.	CONFIDENTIALITY.....	33
E.	GENERAL DUTIES AND REQUIREMENTS	34
1.	Duty to Comply.....	34
2.	Penalties for Violations of Permit Conditions	34
3.	Need to Halt or Reduce Activity Not a Defense.....	34
4.	Duty to Mitigate.....	34
5.	Proper Operation and Maintenance.....	34
6.	Property Rights	35
7.	Duty to Provide Information.....	35
8.	Inspection and Entry	35
9.	Signatory Requirements.....	35
10.	Additional Reporting	35
11.	Continuation of Expiring Permit.....	36

Deleted: 30

Deleted: 30

Deleted: 30

Deleted: 30

Deleted: 31

Deleted: 31

Deleted: 31

Deleted: 31

Deleted: 31

Deleted: 32

Deleted: 32

Deleted: 32

Deleted: 32

Deleted: 32

Deleted: 32

Deleted: 33

Deleted: 33

Deleted: 33

Deleted: 33

Deleted: 33

Deleted: 33

Deleted: 33

Deleted: 34

Deleted: 34

Deleted: 35

APPENDIX A - Project Maps

APPENDIX B - Well Schematics

APPENDIX C - EPA Reporting Forms

APPENDIX D - Region 9 Temperature Logging Requirements

APPENDIX E - Region 9 UIC Pressure Falloff Requirements

APPENDIX F - Plugging and Abandonment Plans

APPENDIX G - Region 9 Step Rate Test Policy

APPENDIX H - CO₂ Specifications and Potential Tracers

APPENDIX I - Operations Timeline

ACRONYMS AND ABBREVIATIONS

bgs	below ground surface
BOD	Biological Oxygen Demand
BOP	Blowout Preventer
CASSM	Continuous Active-Source Seismic Monitoring
CBL	cement bond evaluation log
CDOGGR	California Division of Oil, Gas, and Geothermal Resources
CFR	Code of Federal Regulations
CO ₂	Carbon dioxide
CTS	Crosswell Tomography Surveys
DPTS	Distributed Thermal Perturbation Sensor
DTS	Distributed Temperature Sensors
EPA	Environmental Protection Agency
°F	degrees Fahrenheit
FOT	Fall Off Pressure Test
gpm	gallons per minute
MIT	Mechanical Integrity Test
psi	pounds per square inch
psig	pounds per square inch gauge
RAT	radioactive tracer
RCRA	Resource Conservation and Recovery Act
RTCI	Real-Time Casing Imager
SDWA	Safe Drinking Water Act
SPE	Society of Petroleum Engineering
SRT	Step-Rate Test
TDS	Total Dissolved Solids
TVDss	True Vertical Depth Subsea
UIC	Underground Injection Control
USDW	Underground Sources of Drinking Water
VOC	Volatile Organic Compound
VSP	Vertical Seismic Profiling
ZEI	Zone of Endangering Influence

PART I. AUTHORIZATION TO INJECT

Pursuant to the Underground Injection Control (UIC) regulations of the U.S. Environmental Protection Agency (EPA) codified at Title 40 of the Code of Federal Regulations (CFR), §§124, 144, 145, 146, 147, and 148,

C6 Resources LLC

200 Dairy Ashford Drive, P.O. Box 576
Houston, TX 77001-0576

is hereby authorized, contingent upon permit conditions, to construct and operate a Class V Experimental injection well facility consisting of one (1) injection well, known as C6-1, and one (1) monitoring well, known as C6-2. Both wells are to be located in Section 11, Township 3N, Range 1E, on CoCo Property, LLC land in Solano County, property to which C6 Resources LLC ("Operator", "Permittee") has an easement agreement. Exact locations of each new well shall be established and approved as outlined in this permit.

Deleted: _____Page Break_____

Deleted: ,

Deleted:

Deleted: Shell Oil Company

Deleted: Permit

Deleted: will

EPA shall issue authorization to drill and construct the new wells after the requirements of Financial Responsibility in Part II, Section G of this permit have been met. EPA shall grant authorization to inject in well C6-1 after the requirements of Part II Sections B-D of this permit have been met. Operation of the injection well shall be limited to a maximum volume and pressure as stated in this permit. Total amounts shall not exceed specified limits.

Deleted: will

Deleted: will

Deleted: will

Deleted: must

If approved, injection shall be authorized into either the Domengine Sandstone (beneath the Nortonville Shale), Hamilton Sandstone (beneath the Ione-Capay Shale), Anderson Sandstone (beneath the Meganos Shale), Upper Martinez Sandstone (beneath the Anderson Shale), or Martinez123 Sandstone (beneath the Martinez Shale), depending on which injection and confining zones meet permit requirements. These wells are to be completed for the purpose of injecting and monitoring an anticipated volume of between 2,000 and 6,000 metric tonnes (1 metric tonne = 1,000 kilograms) of commercial-grade supercritical carbon dioxide (CO₂). The injection would occur over a one to two-month period. Subsurface monitoring by C6 Resources, LLC and the West Coast Regional Carbon Sequestration Partnership (WESTCARB) would continue for approximately six (6) months after cessation of injection to gather information on the geology and suitability of the location for sequestration of CO₂. The CO₂ will be transported by tanker trailers to the site, where it will be stored in tanks on-site. Injection shall be authorized only upon the express condition that the Permittee meet the restrictions set forth herein.

Deleted: will

Formatted

Deleted: ,

Deleted: will

Deleted: only

All conditions set forth herein are based on Title 40 §§124, 144, 145, 146, 147 and 148 of the Code of Federal Regulations.

This permit consists of **thirty-five (35)** pages plus the appendices, and includes all items listed in the Table of Contents. Further, it is based upon representations made by C6 Resources, LLC, and other information contained in the administrative record. It is the responsibility of the Permittee to read, understand, and comply with all terms and conditions of this permit.

Deleted: ,

Deleted: , Shell Oil Company

Deleted: on

This permit and the authorization to construct, test, and inject are issued for a period of two (2) years unless terminated under the conditions set forth in Part III, Section B.1 of this permit.

This permit is issued and becomes effective on _____.

Alexis Strauss, Director
Water Division, EPA Region IX

PART II. SPECIFIC PERMIT CONDITIONS

A. REQUIREMENTS PRIOR TO DRILLING, TESTING, CONSTRUCTING, OR OPERATING

1. Financial Assurance

The Permittee shall supply evidence of financial assurance, in accordance with Section G of this part, prior to commencing Injection and Monitoring Well Drilling and Construction.

2. Field Demonstration Submittal, Notification, and Reporting

(a) Prior to each demonstration required in the following sections B through D, the Permittee shall submit plans for procedures and specifications to the U.S. Environmental Protection Agency Region IX Ground Water Office (“EPA”) for discussion and approval. The submittal address is provided in paragraph E.5.(h). of this part. No demonstration in these sections may proceed without prior written approval from EPA.

(b) The Permittee shall notify EPA at least thirty (30) days prior to performing any required field demonstrations after EPA approves the demonstration workplan, in order to allow EPA to arrange to witness if so elected.

Deleted: must

(c) The Permittee shall submit results of each demonstration required in this section to EPA within sixty (60) days of completion.

Use of California Division of Oil, Gas, and Geothermal Resources (“CDOGGR”) reporting forms (such as a Well Summary Report) is acceptable, provided all information specified by this permit is included.

B. WELL CONSTRUCTION

1. Locations of Wells

Injection well C6-1 and monitoring well C6-2, authorized under this permit, will be located approximately 1,700 feet south of Montezuma Hills Road, near Birds Landing, California (See Appendix A, Figure 1) on CoCo Property, LLC land. C6 Resources LLC has an easement agreement with CoCo Property, LLC for use of the land. Monitoring well C6-2 is proposed to be placed 100 to 200 feet away from injection well C6-1. The proposed general location for the two new wells is found in Appendix A, Figures 2 and 3.

Deleted: in

Deleted: ,

Deleted: a memorandum of

Deleted: and on the up dip side of

(a) Prior to drilling any well, the Permittee shall submit proposed field coordinates (Section, Township, Range, with latitude/longitude) for the surface location of that specific well; for subsequent wells, also provide the

Deleted: must

distance between all wells, along with any justification for the proposed separation distance between the wells, both at the surface and at total depth.

- (b) After drilling is completed, the Permittee shall submit final field coordinates (Section, Township, Range, with latitude/longitude) of any well constructed under this permit with the Final Well Construction Report required under paragraph 9(a) of this section. If final well coordinates differ from the proposed coordinates submitted under paragraph (a) above, prior written approval by EPA shall be included.

Deleted: must

Deleted: justification and documentation of any communication with and prior written

2. Information/Data Collection and Testing during Drilling and Construction

Five geologic zones were identified in the permit application as possible injection targets. The Anderson Sandstone is the primary target. The injection well will be completed at that depth, or at the depth of an alternate target sandstone formation, based upon data obtained before casing the deep part of the well. If the Anderson Sandstone proves unsatisfactory for injection, the Hamilton and Domengine Sandstone formations shall serve as alternate injection zones. Lastly, the Martinez123 and Upper Martinez Sandstones shall be investigated for injection if the previously listed zones do not meet regulatory and operational requirements. A diagram of the geologic column, that includes each of the proposed target injection zones and overlying confining zones, is found in Appendix A, Figure 4. The Proposed Well Schematics for injection well C6-1 are found in Appendix B, Figures 1 and 2 and for monitoring well C6-2 in Appendix B, Figures 3 and 4.

Deleted: and t

Deleted: does not meet project requirements

Deleted: will

Deleted: will

Logs and other tests conducted during drilling and construction of both the injection and monitoring wells shall include, at a minimum, deviation checks, casing logs, and injection formation tests as outlined in 40 CFR §146.12(d). Open Hole logs shall be conducted in wells C6-1 and C6-2 over the entire open hole sequence below the conductor casing.

During construction of injection well C6-1, Permittee shall conduct Formation Evaluation wireline logging operations and shall provide and use those results to estimate and report values for hydrocarbon saturation, porosity, lithology, and rock mechanical properties for both the injection and confining zones identified within the permitted geological sequence.

For both injection well C6-1 and monitoring well C6-2, before surface, intermediate, and long string casings are set, dual induction/spontaneous potential/gamma ray/caliper (DIL/SP/GR/CAL) logs will be run over the course of the entire open hole sequences after each well is drilled to each respective terminal depth. After each casing is set and cementing is completed, a spherically focused cement bond evaluation log (CBL) will be run over the course of the entire cased hole sequence (See Section D.2(a).(iv). of this part) of each well.

3. Injection Formation Testing

Injection formation information, as described in 40 CFR 146.12(e), shall be determined through well logs and tests and shall include porosity, permeability, static formation pressure, and effective thickness of the injection zone. A summary of results shall be submitted to EPA with the Final Construction Report required in paragraph 9(a) of this section and updated periodically with subsequent analyses.

Deleted: Reservoir compressibility (typically coefficient “c”) must also be computed.

(a) Formation Water Testing

Deleted: Ground

During construction of the wells, information relating to formation water of potential injection zones at these sites shall be obtained and submitted to EPA. This information shall include direct Total Dissolved Solids (“TDS”) analysis of target injection formation water to demonstrate either the presence and characteristics of, or the lack of, any Underground Sources of Drinking Water (“USDW,” as defined in 40 CFR §144.3). See Appendix A, Figure 5 for regional aquifer salinity measurements.

Deleted: ground

Permittee shall provide well logs and representative water sample analyses from the targeted injection aquifer using method(s) approved by EPA as evidence sufficient to confirm compatibility of the injectate with the injection formation. Formation water samples from the injection zone will be collected (swabbed or other approved method) from injection well C6-1 upon its completion. Field measurements of pH, electrical conductance, and temperature will be carried out to confirm that representative Anderson, Hamilton, Domengine, Martinez123 or Upper Martinez Sand Formation water is being collected. Subsequent laboratory analysis of the samples will include at least Trace Metals, Alkalinity, Conductivity, Hardness, pH, Specific Gravity (see ILE.1(a)), and Oil and Grease (per 40 CFR §136.3, Table I).

Deleted: The

Deleted: . These analyses shall be

(b) Step-Rate Test (“SRT”)

Permittee shall conduct a SRT on injection well C6-1 to evaluate formation fracture pressure before CO₂ injection is authorized. Refer to Society of Petroleum Engineering (“SPE”) paper #16798 for test design and analysis. The SRT results will be used to establish the maximum allowable injection pressure and rate limitations, in accordance with section D, paragraphs 3 and 4 of this part. Detailed plans for conducting the SRT shall be submitted to EPA for review, possible editing, and approval. Once approved, Permittee may schedule the SRT, providing EPA at least thirty (30) days notice before the SRT is conducted. Permittee shall adhere to the following conditions in designing and conducting their required SRT:

Deleted: Upon termination of recovery of formation fluids (including produced fluids intended for later use in well testing), Permittee shall observe, measure and analyze down-hole pressure build-up data to determine formation and reservoir properties using established reservoir engineering analysis methods. Permittee shall submit a proposed procedure at least 30 days prior to conducting the fluid withdrawal and pressure build-up testing for approval. Results of the analysis shall be included in the Final Well Construction Report when submitted.¶

Deleted: carbon dioxide

Formatted

Deleted: must

- (i) Injection as proposed in an approved SRT procedure is temporarily authorized while the SRT is completed.
- (ii) Prior to testing, shut in the well long enough so that the bottom-hole pressure approximates shut-in formation pressure.
- (iii) Measure pressures with a down-hole pressure bomb or other approved pressure monitoring system and synchronize the data with data from a surface pressure recorder. Data sampling rate shall allow for observation and analysis of the pressure transient behavior during each rate step as well as during the final pressure falloff period which is discussed in item (vi) below.
- (iv) Use equal-length time step intervals throughout the test; these should be technically justified and should be sufficiently long to overcome well bore storage and to achieve radial flow. Use thirty (30) minute or longer time intervals.
- (v) Record at least three (3) time steps (data points on pressure vs. flow plot) before reaching the anticipated fracture pressure. Use one (1) barrel per minute rate increments in the early test stages. Larger rate increments may be used later in the test, but justification for this larger rate shall be provided to EPA for approval.
- (vi) At the end of the test, shut down pumps and record the instantaneous shut in pressure and observe the pressure falloff for a sufficient time to observe and later analyze the radial flow portion of the injection zone during the SRT. The length of time for pressure falloff observation shall be determined and discussed in Permittee's submission plans in advance of conducting the SRT.
- (vii) Permittee shall report the results to EPA within 45 days of conducting the SRT. The results shall include analyses of the pressures versus rate and the transmissivity and storativity for the stepped rates throughout the SRT by analyzing the pressure transient data.
- (viii) Permittee may produce water from the saline injection interval, filter it, and then use it for the step-rate injectivity test. Permittee may also use commercial brine to conduct the SRT. Laboratory analysis that yields representative data on the physical, chemical, or other relevant characteristics of all injected fluids proposed for use during the SRT shall be conducted in accordance with requirements outlined in paragraph E.1.(a). If using non-native fluids, laboratory analysis of proposed SRT injection fluids shall confirm the non-hazardous nature of the fluids before the SRT is conducted.

Deleted: must

Deleted: request

Deleted: must

Deleted: approved by

Deleted: period

Deleted: must

Deleted: the

Deleted: must

Deleted: must

Deleted: may be

- (ix) Permittee has proposed conducting an initial, low-rate, low-injection pressure injectivity test ahead of the SRT to assess receptivity of the potential injection interval. Fluorescein shall be added to the water to trace the fluid before injecting the tagged water back into the injection well. Based on the data obtained during the injectivity test, a detailed SRT plan will be designed and performed such that test injection pressures span the range from the measured initial shut-in to the parting pressure of the injection interval. Detailed plans for conducting the injectivity test shall be submitted to EPA for review, possible editing, and approval. If approved, Permittee may schedule the injectivity test, providing EPA at least thirty (30) days notice before the test is conducted. Non-native fluids to be used during the injectivity test shall comply with Hazardous Waste Determination (see paragraph D.1.(b). of this section) and fluid testing requirements (see paragraph E.1.(a). of this section).

Deleted: "mini-frac"

Deleted: mini-frac

Deleted: in order

Deleted: mini-frac

Deleted: must

Deleted: mini-frac

Deleted: mini-frac

Deleted: must

(c) Fall Off Pressure Test ("FOT")

(i) Initial Pressure Transient Test

To determine and to monitor formation characteristics, a a FOT using formation or commercial brine may be performed in the appraisal well (C6-1) prior to carbon dioxide injection in order to investigate formation properties (e.g., permeability, etc.), presence or absence of near-well boundaries, and wellbore conditions (skin, completion efficiency, and wellbore storage). The injection brine shall be filtered to remove suspended solids (e.g., sand, silt, drilling mud) and temporarily stored in an above-ground tank. Fluorescein shall be added to the water to trace the fluid before injecting the tagged water back into the injection well at a constant rate. Downhole pressure and temperature shall be monitored in the injection well during the injectivity test. The pressure transient response observed during injection and the pressure fall-off period shall be analyzed to determine well and formation characteristics.

Deleted: two-well constant rate interference pressure transient test/

Deleted: shall

Deleted: storativity,

Deleted: will

Deleted: will

Deleted: will

Deleted: both

Deleted: and observation

Deleted: s

Deleted: will

- (1) Detailed plans for conducting the FOT (including the pre-FOT injection period) shall be submitted to EPA for review and approval. Once approved, Permittee may schedule the FOT, providing EPA at least thirty (30) days notice before the test is conducted.

Deleted: must

Deleted: the

- (2) Laboratory analysis that yields representative data on the physical, chemical, or other relevant characteristics of all non-native injected fluids proposed for use during the FOT shall be conducted in accordance with requirements outlined in paragraph E.1.(a). Laboratory analysis of proposed FOT

Deleted: must

injection fluids shall confirm the non-hazardous nature of the non-native fluids before the FOT is conducted.

Deleted: must

Deleted: may be

- (3) The FOT shall be conducted in accordance with EPA guidance found in Appendix E. Any sections of the guidance procedure that Permittee wishes to modify shall be submitted to EPA for approval in advance of conducting the test.

Deleted: will

Deleted: the

Deleted: must

Deleted: specifically addressed, justified and

Deleted: The

- (4) Permittee shall use the test results to recalculate the Zone of Endangering Influence (“ZEI,” as defined in 40 CFR §146.6) and to evaluate whether any corrective action is now required (refer to Section C of this part); a summary of the recalculation shall be included with the FOT report.

- (5) The results of the test shall be included with the next monthly report due after completion of the FOT, as described in Section E, paragraph 5 of this part.

(ii)

Deleted: Final Pressure Transient Test

4. Drilling, Work-over, and Plugging Procedures

Drilling, work-over, and plugging procedures shall comply with the CDOGGR “Onshore Well Regulations” of the California Code of Regulations, found in Title 14, Natural Resources, Division 2, Department of Conservation, Chapter 4, Article 3, Section 1722-1723. Permittee does not need to apply to the CDOGGR for an injection well permit, but shall adhere to adopted CDOGGR standards, when necessary, in addition to U.S. EPA Region IX requirements as long as not inconsistent with any EPA requirements. Drilling procedures shall also include the following:

Deleted: A FOT shall be run in injection well C6-1 at the termination of the injection period. The FOT will be conducted in accordance with EPA guidance found in Appendix E. Any sections of the guidance procedure that the Permittee wishes to modify must be specifically addressed, justified and submitted to EPA for approval in advance of conducting the test. The Permittee shall use the test results to recalculate the ZEI; a summary of the recalculation shall be included with the FOT report. Detailed plans for conducting the FOT must be submitted to EPA for review and approval. Once approved, the Permittee may schedule the FOT, providing EPA at least thirty (30) days notice before the test is conducted.¶

Deleted: Particulate filters may be used upstream of the well, at the discretion of the operator, to prevent formation plugging or damage from particulate matter. The Permittee shall include any filter specifications in the Final Construction Report required in paragraph 9(a) of this section, including proposed particle size removal with any associated justification for the selected size. For any particulate filters used, follow appropriate waste analysis and disposal practices.¶

<#>¶

Deleted: must

Deleted: The

Deleted: must

Deleted: as a component of

- (a) Details for staging long-string cementing or justification for cementing without staging;
- (b) Records of daily Drilling Reports (electronic and hard copies);
- (c) Blowout Preventer (“BOP”) System testing on recorder charts including complete explanatory notes during the test(s),
- (d) Casing and other tubular and accessory measurement tallies; and
- (e) During drilling, Permittee may add a small quantity of Optitrak 600 blue dye to the drilling mud to discriminate mud filtrate from background formation fluid so that when water samples are obtained, the amount of mud filtrate in the samples can be determined.

Deleted: the

- (f) During drilling through the proposed injection intervals, Permittee may add fluorescein fluorescent dye to the drilling fluids/mud.

Deleted: the

Procedures provided on reporting forms such as CDOGGR's Well Summary Report are acceptable, provided all required information as specified above is included.

5. Casing and Completion Specifications

Notwithstanding any other provisions of this permit, the Permittee shall case and cement the wells to prevent the movement of fluids into or between USDWs. Cement evaluation logging analyses shall be performed as described in paragraph D.2.(a).(iv). of this part. Casing strings shall be maintained in good condition throughout the operating life of the wells. See Appendix B, Figure 1, for the approximate construction specifications pertaining to the two proposed wells C6-1 and C6-2.

EPA may require or allow the operator's request for minor alterations to the construction requirements for wells C6-1 and C6-2 based upon the information obtained during well drilling and related operations if the proposed casing setting depths will not completely cover the base of the USDWs and the confining formations located immediately above any of the proposed injection zones. Alterations and other rework operations that may occur later in the course of operation of the wells are considered minor for this permit and shall be properly reported (use EPA Form 7520-12).

Deleted: must

The exact depths of injection zone intervals and casing setting depths are expected to be realized upon drilling. Final depths shall be determined by field conditions, sieve analysis, well logs, and other input from the drilling consultant and geologists. EPA approval shall be obtained for the proposed Drilling Plan and any revisions to the plan prior to installation. These modifications shall be documented in the Final Well Construction Report (See paragraph 9(a) below).

Deleted: will

Deleted: the

Deleted: will

Deleted: will

6. Injection Intervals

Injection shall be permitted and systematically authorized for the Anderson, Hamilton, Domengine, Martinez123 and Upper Martinez formations, which are expected to occur at depths ranging from approximately 7,765 to 12,530 feet vertically below sea-level ("TVDss"), as indicated from offset well records and logs. Initial injection shall occur at approximately 10,650 feet TVDss in the Anderson Sandstone formation. However, if this injection interval proves unsatisfactory or unusable as an injection zone, other formations may be systematically considered for injection. These zone changes shall be requested in writing and proposed procedures will include plans for placement of cement across previously perforated injection intervals, testing of the cement plug, and perforating the alternative injection interval. These injection interval changes shall be approved by EPA before they are

Deleted: below ground surface

Deleted: below ground surface

Deleted: must

enacted and are considered minor in this permit. These alterations and other rework operations that may occur later in the course of operation of the wells shall be properly reported (EPA Form 7520-12) and Permittee shall demonstrate that the injection well has mechanical integrity in accordance with D.2.(b).(i). before any injection is authorized.

Deleted: must

Deleted: the

Deleted: must

Well C6-1 shall be permitted for injection into the formations listed below. As discussed in paragraph B.2 of this section, the Anderson Sandstone is the primary target. The Hamilton and Domengine Sandstone formations will serve as alternate injection zones, while the Martinez123 and Upper Martinez Sandstones willshall be investigated for injection only if the previously listed zones do not meet regulatory and operational requirements.

Anderson Sandstone:

The top of the Anderson Sandstone is at an approximate depth of 10,650 ft TVDss. The Anderson Sandstone injection unit is anticipated to be approximately 700 feet thick (based on offset well logs).

Deleted: below ground surface ("bgs")

Deleted: 600

Hamilton Sandstone:

The top of the Hamilton Sandstone is at an approximate depth of 9,000 feet TVDss. The Hamilton Sandstone injection unit is anticipated to be approximately 715 feet thick (based on offset well logs).

Deleted: bgs

Deleted: 245

Domengine Sandstone:

The top of the Domengine Sandstone is at an approximate depth of 7,765 feet TVDss. The Domengine Sandstone injection unit is anticipated to be approximately 355 feet thick (based on offset well logs). The Domengine Sandstone is the primary productive interval in the nearby Rio Vista field.

Deleted: bgs

Deleted: 200

Martinez123 Sandstone:

The top of the Martinez123 Sandstone is at an approximate depth of 12,530 feet TVDss. The Martinez123 Sandstone injection unit is anticipated to be approximately 1,000 feet thick (based on offset well logs).

Deleted: bgs

Upper Martinez Sandstone:

The top of the Upper Martinez Sandstone is at an approximate depth of 12,245 feet TVDss. The Upper Martinez Sandstone injection unit is anticipated to be 165 feet thick (based on offset well logs).

Deleted: bgs

Deleted: 50

7. Confining Layers

Field information on the confining formations at the C6-1 and C6-2 sites, such as their characteristics, thicknesses, and local structures, ~~shall~~ be obtained and updated during drilling of the injection and monitoring wells and shall be included in the Final Well Construction Report required in paragraph 9(a) of this section.

Deleted: will

The confining formations associated with the proposed injection zones are listed below:

Meganos Shale:

The confining layer above the Anderson Sandstone, the Meganos Shale, underlies the Hamilton Sandstone. It is expected to be more than ~~900~~ feet thick at the site of injection. The top of the Meganos Shale confining layer is anticipated to be at 9,715 feet bgs.

Deleted: 950

Ione-Capay Shale:

The confining layer above the Hamilton Sandstone, the Ione-Capay Shale, underlies the Domengine Sandstone. It is expected to be approximately 900 feet thick at the site of injection. The top of the Martinez Shale confining layer is anticipated to be at 8,120 feet ~~TVDss~~.

Deleted: bgs

Nortonville Shale:

The confining layer above the Domengine Sandstone, the Nortonville Shale, underlies the Markley Sandstone and is expected to be approximately 340 feet thick at the site of injection. The top of the Nortonville Shale confining layer is anticipated to be at 7,415 feet ~~TVDss~~.

Deleted: bgs

Martinez Shale:

The confining layer above the Martinez123 Sandstone, the Martinez Shale, underlies the Upper Martinez Sandstone. It is expected to be approximately 120 feet thick at the site of injection. The top of the Martinez Shale confining layer is anticipated to be at 12,410 feet ~~TVDss~~.

Deleted: bgs

Anderson Shale:

The confining layer above the Upper Martinez Sandstone, the Anderson Shale, underlies the Anderson Sandstone. It is expected to be approximately 900 feet thick at the site of injection. The top of the Anderson Shale confining layer is anticipated to be at 11,350 feet ~~TVDss~~.

Deleted: bgs

8. Monitoring Devices

Permittee shall install and maintain in good operating condition:

Deleted: The

- (a) A tap on the discharge line between the injection pump and the wellhead for the purpose of obtaining representative samples of injection fluids; and
- (b) Devices to continuously measure and record injection pressure, annulus pressure, flow rate, and injection volumes, subject to the following:
 - (i) Pressure gauges shall be of a design to provide:
 - (1) A full pressure range of at least fifty (50) percent greater than the anticipated operating pressure; and
 - (2) A certified deviation accuracy of five (5) percent or less throughout the operating pressure range.
 - (ii) Flow meters shall measure cumulative volumes and be certified for a deviation accuracy of five (5) percent or less throughout the range of injection rates allowed by the permit.
- (c) Devices to continuously measure and record seismic activity. Array elements shall be installed in three (3) approximately 100-foot deep wells near the pilot area.

Deleted: will

Deleted: The monitoring equipment will be able to distinguish between natural and induced seismicity events.

9. Final Well Construction Report and Completion of Construction Notice

- (a) Permittee shall submit a final well construction report, including logging, and other results, with a schematic diagram and detailed description of construction, including driller's log, materials used (i.e., tubing tally), and cement (and other) volumes, to EPA within sixty (60) days after completion of each respective well (C6-1 and C6-2)
- (b) Permittee shall also submit a notice of completion of construction to EPA (see EPA Form 7520-9 in Appendix C) within sixty (60) days after completion of each respective well (C6-1 and C6-2). Injection operations may not commence until EPA has inspected or otherwise reviewed the injection and monitoring wells and notified the Permittee that it is in compliance with the conditions of the permit.

Deleted: The

Deleted: must

Deleted: The

Deleted: must

10. Proposed Changes and Workovers

Permittee shall give advance notice to EPA, as soon as possible, of any planned physical alterations or additions to the permitted injection or monitoring wells. Any changes in well construction require prior approval of EPA and may require a permit modification under the requirements of 40 CFR §§144.39 and 144.41. In addition, Permittee shall provide all records of well workovers, logging, or other subsequent test data, including required mechanical integrity testing, to EPA within sixty (60)

Deleted: The

Deleted: the

days of completion of the activity. Appendix C contains samples of the appropriate reporting forms. Demonstration of mechanical integrity shall be performed within thirty (30) days of completion of workovers or alterations to the tubing-casing-packer annular system and prior to resuming injection activities, in accordance with Section D paragraphs 1(a) and 2 of this part.

C. CORRECTIVE ACTION

Corrective action may be necessary for existing wells in the Area of Review (“AOR”, defined in 40 CFR §146.6) that penetrate the injection zone, or which may otherwise cause movement of fluids into USDWs (see 40 CFR §§144.55 and 146.7).

No corrective action plan is currently required as there are no active or plugged and abandoned wells within the 1/4-mile Area of Review (AOR), nor do any wells penetrate the confining or injection zones within a one-mile radius of the well sites. See Appendix A, Figure 6.

1. ZEI Review (should be a defined term)

After completion of all CO₂ injection, the ZEI calculation, including the pressure and CO₂ fronts shall be reviewed by Permittee, based on any new data obtained from the FOT and static reservoir pressure tests required in Section B, paragraph 3(c) of this part. A copy of the modified ZEI calculations, along with all associated assumptions or justifications, shall be provided to EPA with the monthly report due after cessation of injection activities, as required in Section E paragraph 5 of this part.

Deleted: carbon dioxide

Formatted

Deleted: waste

Deleted: the

Formatted

2. Implementation of Corrective Actions

- (a) If any wells requiring corrective action are found within the modified ZEI, a list of these wells along with their locations shall be provided to EPA as soon as possible.
- (b) If requested by EPA, Permittee shall submit a plan to re-enter, plug, and abandon the wells listed in paragraph (a) above in such a manner to prevent the migration of fluids into a USDW.
- (c) Permittee may not commence corrective action activities without prior written approval from EPA.

Deleted: the

Deleted: The

D. WELL OPERATION

1. Demonstrations Required Prior to Injection

CO₂ injection operations using well C6-1 may not commence until construction of injection well C6-1 and monitoring well C6-2 is complete and the Permittee has complied with following paragraphs (a) and (b):

Deleted: Injection

(a) Mechanical Integrity

Permittee shall demonstrate that the injection (C6-1) and monitoring (C6-2) wells have and maintain mechanical integrity consistent with CFR §146.8 and with paragraph 2 of this section. Permittee shall demonstrate that there are not significant leaks in the casing strings and tubing and that there is not significant fluid movement into or between USDWs through the casing wellbore annulus or vertical channels adjacent to the injection wellbore. Permittee may not commence initial injection into well C6-1, nor recommence injection after a workover ~~that has compromised well integrity~~ until it has received written notice from EPA that such a demonstration is satisfactory.

Deleted: The

Deleted: The

Deleted: The

Deleted: which

(b) Injectate Hazardous Waste Determination

Permittee shall perform an Injectate Hazardous Waste Determination of each unique CO₂ stream injected into the injection well authorized by this permit, including fluids, dyes and tracers used in well testing and standard injection operations, according to 40 CFR §262.11. Permittee is not required to perform a Hazardous Waste Determination of any native formation fluids to be re-injected during testing or construction. The results of the analyses shall demonstrate that the injectate does not meet the definition of hazardous waste as defined in 40 CFR §261.

Deleted: The

Deleted: waste

Deleted: The

(i) Permittee ~~shall~~ be required to submit a letter to EPA confirming that the “Hazardous Waste Determination” was carried out according to 40 CFR §261 within sixty (60) days of its having been completed.

Deleted: The

Deleted: will

(ii) Permittee shall perform an additional “Hazardous Waste Determination” whenever there is a process change or a change in fluid chemical constituents or characteristics.

Deleted: The

2. Mechanical Integrity

(a) Mechanical Integrity Tests (“MITs”)

Mechanical integrity testing shall conform to the following requirements throughout the life of the wells:

(i) Casing/tubing annular pressure (internal MIT)

A demonstration of the absence of significant leaks in the casing, tubing and/or fluid input lines of both wells C6-1 and C6-2 shall be made by performing a pressure test on the annular space between the tubing and long string casing. This test shall be for a minimum of

thirty (30) minutes at a pressure equal to or greater than the maximum allowable injection pressure. A well passes the MIT if there is less than a five (5) percent change in pressure over the thirty (30) minute period. A pressure differential of at least 350 pounds per square inch ("psi") between the tubing and annular pressures shall be maintained throughout the MIT.

(ii) Continuous pressure monitoring

The tubing/casing annulus pressure and injection pressure of injection well C6-1 shall be monitored and recorded continuously by a digital instrument with a resolution of one tenth (0.1) psi. The average, maximum, and minimum monthly results shall be included in the monthly report to EPA per Section E paragraph 5 of this part unless more detailed records are requested by EPA.

(iii) Injection profile survey (external MIT)

Permittee shall demonstrate that the injectate is confined to the proper zone while injecting into well C6-1. This demonstration shall consist of a radioactive tracer (RAT) and monthly temperature logs (as specified in Appendix D) or other diagnostic tool or procedure as approved by EPA.

Deleted: The

- (1) Radioactive Tracer Log: Detailed plans for conducting the RAT shall be submitted to EPA for review and approval. Once approved, the Permittee may schedule the RAT, providing EPA at least thirty (30) days notice before the external MIT is conducted. The demonstration shall be conducted following perforation of the injection zone interval and before CO₂ injection commences. Native formation fluids or commercial brines may be used to conduct this testing. The results of the testing shall subsequently be presented to EPA. Permittee may not commence CO₂ injection until RAT (or other demonstration) results have been approved by EPA.

Deleted: must

Deleted: for approval

Deleted: The

- (2) Temperature Log: See Appendix D for temperature log requirements. Temperature logs shall be constructed and submitted on a monthly basis per paragraph E 5.(e).(7) of this part.

Deleted: must

Deleted: 7

(iv) Cement Evaluation Analysis

After casing is installed, or after conducting a cement squeeze job in an open hole, or after any well cement repair in either well constructed under this permit, Permittee shall submit cementing

Deleted: , for both

Deleted: s

Deleted: the

records and cement evaluation logs to EPA. These shall demonstrate the isolation of the injection interval and other formations from underground sources of drinking water by means of cementing all strings of the casing well bore annuli to surface. The analysis shall include a spherically-focused tool, run after the long-string casing is set and cemented, which enables the evaluation of the bond between cement and casing as well as of the bond between cement and formation. Permittee may not commence or recommence injection until it has received written notice from EPA that such a demonstration is satisfactory.

Deleted: that

Deleted: surface casing and the long string

Deleted: The

(b) Subsequent MITs

EPA may require that an MIT be conducted at any time during the permitted life of the wells. The Permittee shall also arrange and conduct MITs according to the following requirements:

- (i) Within thirty (30) days from completion of any work-over where the integrity of the tubing-casing-packer annular system is compromised, or when any loss of mechanical integrity becomes evident during operation, an internal pressure MIT shall be conducted on the injection well authorized under this permit. The loss of mechanical integrity shall be reported to EPA within twenty-four hours in accordance with paragraph III.E.10.(d). Any leak shall be sealed and mechanical integrity demonstrated before authorization to re-commence injection is granted.

Deleted: must

Deleted: must

(c) Loss of Mechanical Integrity

Permittee shall notify EPA, in accordance with Part III, Section E paragraph 10 of this permit, under any of the following circumstances:

Deleted: The

- (i) The well fails to demonstrate mechanical integrity during a test, or
- (ii) A loss of mechanical integrity becomes evident during operation, or
- (iii) A significant change in the annulus or injection pressure occurs during normal operating conditions. See Section D.6 of this part.

Furthermore, in the event of (i), (ii), or (iii) above, injection activities shall be terminated immediately and operation shall not be resumed until Permittee has taken actions necessary to restore mechanical integrity of the well and EPA gives approval to recommence injection.

Deleted: the

Deleted: necessary

Deleted: to

(d) Prohibition without Demonstration

After the permit effective date, injection into well C6-1 may continue only if:

- (i) The well has passed an internal pressure MIT in accordance with paragraph 2.(a).(i). of this part; and
- (ii) The Permittee has received written notice from EPA that the internal pressure MIT demonstration is satisfactory.

3. Injection Pressure Limitation

- (a) Maximum allowable injection pressure measured at the wellhead for well C6-1 shall be based on the Step-Rate Test conducted under Section B paragraph 3(b) of this part. EPA ~~shall~~ provide Permittee written notification of the maximum allowable injection pressure for the injection well constructed and operated under this permit, along with a minor modification of the permit under 40 CFR §144.41(e).
- (b) In no case shall pressure in the injection zone during injection initiate new fractures or propagate existing fractures in the injection zone or the confining zone. In no case shall injection pressure cause the movement of injection or formation fluids into or between underground sources of drinking water. In no case shall injection fluids be allowed to migrate to oilfield production wells.

Deleted: will

Deleted: the

4. Injection Volume (Rate) Limitation

- (a) The injection rate for well C6-1 shall not exceed the ~~rate~~ determined as appropriate through the demonstrations conducted in this section and justified by measured friction factors. EPA ~~shall~~ provide written notification of the maximum injection ~~rate~~ allowed under this permit prior to any injection conducted after an approved SRT (see Section B.3(b)).
- (b) ~~Permittee may request an increase in the maximum rate allowed in paragraph (a) above. Any such request shall be made in writing and appropriately justified to EPA.~~
- (c) Any request for an increase in injection rate shall demonstrate to the satisfaction of EPA that the increase in ~~rate shall not interfere with the operation of the facility, its ability to meet conditions described in this permit, change its well classification, or cause migration of injectate or pressure buildup to occur beyond the Area of Review.~~

Deleted: volume

Deleted: will

Deleted: volume

Deleted: The

Deleted: volume

Deleted: will

- (d) Permittee shall inject no more than 6,000 metric tonnes of ~~CO₂~~ into well C6-1. Injection is anticipated to last between one and two months. If operations require a longer period ~~to complete injection of the intended volume~~, injection may continue for a period such that there is sufficient time before the expiration of the permit to conduct the required six (6) month post-injection monitoring program required in paragraph E.3.(a). of this section.

Deleted: The

Deleted: carbon dioxide

Formatted

Deleted: of time

5. Injection Fluid Limitation

- (a) ~~Permittee shall not inject any hazardous waste, as defined by 40 CFR Part 261, at any time. See also paragraph 1(b) of this section.~~

Deleted: The

- (b) Injection fluids not pertaining to well testing shall be limited to commercial grade ~~CO₂ or better of at least 95% CO₂ by volume~~ with small amounts of other gases. Small quantities of perfluorocarbon tracers, noble gases (Neon 20, Argon 36, Krypton 84, Xenon 132), fluorescein, and sulfur hexafluoride (SF₆) may be added to the fluids used in drilling and testing and added to CO₂ injectate to study fluid flow processes, characterize fluid saturations, and detect any leakage out of the injection reservoir up the wellbore or through the cap rock. See Appendix H for commercial grade CO₂ specifications and for a complete list of potential tracers. No fluids shall be accepted from other sources.

Deleted: Carbon Dioxide (

Deleted:)

- (c) Any well stimulation or treatment procedure performed at the discretion of the operator shall be proposed and submitted to EPA for approval prior to implementation.

- (d) Native brines may be produced during the pilot test during initial development of well completion, reservoir testing for aquifer characterization or artificial lift activities required for fluid sampling. These native brines, as well as commercial brines, may be injected during pressure transient, step-rate, mini-frac, fall-off, mechanical integrity or other well testing. Permittee shall submit to EPA a proposal to inject any commercial or native brines for well testing, and ~~shall~~ receive written approval prior to conducting testing. All non-native brines ~~shall~~ adhere to requirements described in paragraph 1(b) of this section and 40 CFR Part 261.

Deleted: must

Deleted: must

6. Tubing/Casing Annulus Requirements

- (a) Corrosion-inhibiting annular fluid shall be used and maintained during well operation. A complete description and characterization shall be submitted to EPA for approval before ~~its~~ use.

- (b) A minimum pressure of one hundred (100) psi at shut-in conditions shall be maintained on the tubing/casing annulus. Within the first two weeks of injection operations, ~~Permittee shall determine the range of fluctuation of~~

Deleted: the

annular pressure for the injection well during periods of normal operation. This normal pressure range shall be submitted with the first monthly report after injection has commenced. Any annular pressure outside of the normal range shall be considered a loss of mechanical integrity and shall be reported to EPA per Paragraph 2(c) of this section.

7. Experimental Objectives – Monitoring, Analysis and Application

This Class V Experimental Project will provide a sophisticated level of investigation and analyses of complex mechanical operations and in situ processes that are expected to evaluate and verify theoretical projections related to the injection of CO₂ at supercritical conditions. Progress is expected throughout this project regarding theoretical predictive analysis and application techniques as new data are acquired and various reservoir and geological characteristics and properties are obtained and confirmed. Active injection and post-injection phase data shall be analyzed and interpreted to determine formation properties, including permeability, compressibility, existence of reservoir boundary effects, fluid properties and CO₂ plume migration and behavior. Reports addressing these objectives shall be made as outlined in Part II, Section E, Paragraph 5.

Deleted: carbon dioxide (

Deleted:)

Deleted: will

E. **MONITORING, RECORDKEEPING, AND REPORTING OF RESULTS**

1. Injection Well Monitoring Program

Injection fluids shall be analyzed to yield representative data on their physical, chemical, or other relevant characteristics. These analyses shall be conducted for all CO₂ sources, tracers, dyes and all fluids injected during well testing (except native formation fluids). Permittee shall take samples at or before the wellhead for analysis. Test results shall be submitted to EPA as required within this permit (see paragraph 5.c.(i). below).

Deleted: will

Deleted: The

Samples and measurements shall be representative of the monitored activity. Permittee shall use applicable analytical methods described in Table I of 40 CFR §136.3 or in EPA Publication SW-846, "Test Methods for Evaluating Solid Waste, Physical/Chemical Methods," unless other methods have been approved by EPA.

Deleted: The

Deleted: utilize

(a) Summary of acceptable analytic Methods:

- (i) Inorganic Constitutents – appropriate USEPA methods for Major Anions and Cations (including an anion/cation balance).
- (ii) Solids - Standard Methods 2540C and 2540D for Total Dissolved Solids and Total Suspended Solids.

- (iii) General and Physical Parameters – appropriate USEPA methods for Temperature, Turbidity, pH, Conductivity, Hardness, Specific Gravity, Alkalinity, and Biological Oxygen Demand (“BOD”); and Density and Viscosity (See EPA Bulletin 712-C-96-032) under standard conditions.
- (iv) Trace Metals - USEPA Method 200.8.
- (v) Volatile Organic Compounds (“VOCs”) - USEPA Method 8260C.
- (vi) Semi-Volatile Organic Compounds - USEPA Method 8270.

(b) Analysis of injection fluids.

Monthly, or whenever there is a significant change in injection fluids, injectate sampling and analyses shall be performed as outlined in paragraph (a) above.

2. Monitoring Information

Records of monitoring activity required under this permit shall include:

- (a) Date, exact location, and time of sampling or field measurements;
- (b) Name(s) of individual(s) who performed sampling or measuring;
- (c) Exact sampling method(s) used;
- (d) Date(s) laboratory analyses were performed;
- (e) Name(s) of individual(s) who performed laboratory analyses;
- (f) Types of analyses; and
- (g) Results of analyses.

3. Monitoring Devices

(a) Continuous monitoring devices

Injectate temperature, annular pressure, and injection pressure shall be measured downhole and/or at the wellhead of injection well C6-1 using equipment of sufficient precision and accuracy.

Downhole pressure and temperature sensors may be installed below the packer as close to the depth of the target injection formation as possible in injection well C6-1 and monitoring well C6-2. Backup pressure and temperature gauges may be installed above the packer as well. The downhole sensors shall be connected to surface read-out gauges by fiber optic cables that shall be strapped/clamped to the outside of the tubing. The fiber optic cables shall enable the construction of a temperature distribution profile over the entire depth of the well. The downhole sensors shall also be tied into the data acquisition system so that the continuously monitored and recorded reservoir response can be sequenced and archived with the surface data.

Deleted: will

Deleted: will

Deleted: will

Deleted: will

Deleted: will

All measurements shall be recorded at minimum to a resolution of one tenth of the unit of measure (e.g. injection rate and volume shall be recorded to a resolution of a tenth of a gallon; pressure shall be recorded to a resolution of a tenth of a psig; injection fluid temperature shall be recorded to a resolution of a tenth of a degree Fahrenheit). Exact dates and times of measurements, when taken, shall be recorded and submitted. Injection rate shall be measured in the supply line immediately before the wellhead of well C6-1. Permittee shall continuously monitor and record the following parameters at the prescribed frequency:

Deleted: must

Deleted: must

Deleted: must

Deleted: must

Deleted: must

Deleted: The

Monitoring Parameter	Frequency	Instrument
Injection rate (gallons per minute)	Hourly	Digital recorder
Daily Injection Volume (gallons)	Daily	Digital totalizer
Total Cumulative Volume (gallons)	Daily	Digital totalizer
Wellhead injection pressure (psig)	Hourly	Digital recorder
Bottom-hole injection pressure (psig)	Hourly	Digital recorder
Annular pressure (psig)	Hourly	Digital recorder
Wellhead injection fluid temperature (°F)	Hourly	Digital recorder
Bottom-hole injection fluid temperature (°F)	Hourly	Digital recorder

Permittee is required to adhere to the required format below for reporting injection rate and well head injection pressure. An example of the required electronic data format:

Deleted: The

<u>DATE</u>	<u>TIME</u>	<u>INJ. PRESS (PSIG)</u>	<u>INJ. RATE (GPM)</u>
03/09/10	16:33:16	1525.6	65.8
03/09/10	17:33:16	1525.4	66.3

Each data line shall include four (4) values separated by a consistent combination of spaces or tabs. The first value contains the date measurement in the format of mm/dd/yy or mm/dd/yyyy, where mm is the number of the month, dd is the number of the day and yy or yyyy is the number of the year. The second value is the time measurement, in the format of hh:mm:ss, where hh is the hour, mm are the minutes and ss are the seconds. Hours should be

calculated on a 24-hour basis, i.e. 6 PM is entered as 18:00:00. Seconds are optional. The third value is the well head injection pressure in psi. The fourth column is injection rate in gallons per minute.

Bottom-hole pressure and temperature monitoring shall proceed during the active injection phase and subsequent falloff phase following secession of injection activity. The post-injection continuous temperature and pressure monitoring phase shall continue for up to six (6) months after completion of injection.

Deleted: will

Deleted: will

Deleted: at least

(b) Subsurface CO₂ Monitoring, Tracking and Imaging

(i) Proposed Monitoring:

Deleted: Required

- (1) Vertical Seismic Profiling (“VSP”): The VSP method shall test the ability to detect and spatially map the location and spatial extent of the CO₂ plume injected for sequestration. VSP shall use seismic sensors in the subsurface (temporarily deployed in well C6-1) along with surface Vibroseis sources. A VSP survey shall be performed two (2) times, once before and once after CO₂ injection to detect CO₂-induced changes. Multiple seismic sensors shall be deployed in the C6-1 well during each VSP survey, spanning the interval from below the selected reservoir to several hundred feet above it.

Deleted: will

Deleted: in three-dimensions

Deleted: will

Deleted: clamped to

Deleted: vibration generators

Deleted: will

Deleted: will

- (2) Crosswell Tomography Surveys (“CTS”): CTS is designed to provide high resolution two-dimensional imaging of the plane between the injection and monitoring wells. Pre- and post-injection (time-lapse) CTS shall be performed.

Deleted: will

- (3) Distributed Temperature Sensor (“DTS”) shall be deployed to measure the temperature variation along the length of the wellbore.

Formatted: Bullets and Numbering

- (4) Thermal Perturbation Study of CO₂ Phase Saturation: A Distributed Thermal Perturbation Sensor (“DTPS”), consisting of a fiber-optic distributed temperature sensor and a linear heating cable, shall be deployed in the well as a method to detect any CO₂ leakage outside the wellbore. By measuring thermal conductivity with the DTPS prior to CO₂ injection and periodically after

Formatted: Bullets and Numbering

Deleted: will

injection commences, it is expected that any leakage into the confining formation can be detected.

Reservoir Saturation Monitoring: Dual-burst thermal decay time tools look at the thermal neutron adsorption, described by the capture cross section of the formation, to infer water saturation.

(ii) Additional Proposed Monitoring:

(1) Continuous Active-Source Seismic Monitoring (“CASSM”): The CASSM survey may be used to monitor the growth of the plume between the injection and monitoring wells, and the time-lapse crosswell data sets would provide full tomographic imaging of the plume after the injection ceases.

(2) A U-tube system may be deployed in the monitor well (C6-2) to allow periodic fluid sampling from the injection formation during the CO₂ injection test.

(3) A Real Time Casing Imager (RTCI) may be used to provide information about well casing deformation and integrity in real-time without interrupting operations to run logging tools.

(iii) Calibration and Maintenance of Equipment

All monitoring and recording equipment shall be calibrated and maintained on a regular basis to ensure proper working order of all equipment.

4. Recordkeeping

Permittee shall retain the following records and shall have them available at all times for examination by an EPA inspector:

- (a) All monitoring information, including required observations, calibration and maintenance records, recordings for continuous monitoring instrumentation, copies of all reports required by this permit, and records of all data used to complete the permit application;
- (b) Information on the nature and composition of all injected fluids;
- (c) Results of the injectate “Hazardous Waste Determination” according to 40 CFR §262.11. Analyses results shall demonstrate that the injectate, including CO₂ and all fluids used for well testing (except native formation fluids), does not meet the definition of hazardous waste as defined in 40 CFR §261; and

Deleted: The tool will be able to measure carbon to oxygen ratios, indicating the presence of water, gas or hydrocarbon zones.

Formatted: Bullets and Numbering

Formatted

Formatted: Bullets and Numbering

Formatted

Formatted: Bullets and Numbering

Deleted: The

(d) Records and results of MITs, any other tests required by EPA, and any well workovers completed.

(e) Permittee shall maintain copies (or originals) of all records described in paragraphs (a) through (d) above during and for five (5) years after the operating life of the well and shall make such records available at all times for inspection at the facility ~~if personnel are present for field operations. If the facility is temporarily shut down and no personnel are present, the records shall be available at 150 N. Dairy Ashford, Houston, Texas 77079.~~

Deleted: The

(f) Permittee shall only discard the records described in paragraphs (a) through (d) if:

Deleted: The

- (i) the records are either delivered to the Regional Administrator, or
- (ii) written approval from the Regional Administrator to discard the records is obtained.

5. Reporting

Monthly, Permittee shall submit accurate reports to EPA containing, at minimum, the following information:

Deleted: the

- (a) Hourly and daily values, submitted in electronic format, for the continuously monitored parameters specified for the injection wells in paragraph 3(a) of this section;
- (b) Monthly cumulative total volumes, as well as monthly average, minimum, and maximum values for the continuously monitored rate, pressure, and temperature parameters specified for the injection wells in paragraph 3(a) of this section, unless more detailed records are requested by EPA;
- (c) Monthly analyses, to be included in the next monthly report following completion:
 - (i) Injection fluid characteristics for parameters specified in paragraph 1(a) of this section;
 - (ii) When appropriate, Injectate Hazardous Waste Determination according to Section D, paragraph 1(b) of this part.
- (d) To be included with the next monthly report immediately following completion, results of any MITs or other tests required by EPA, and any well workovers completed;
- (e) To be included in the monthly report due after cessation of injection

activities, the following analyses:

- (i) Annual reporting summary (7520-11 in Appendix C);
 - (ii) FOT results as required in Section B, paragraph 3(c) of this part;
 - (iii) Shut-in static reservoir pressure cumulative behavior plot of the injection zone, as required in Section B, paragraph 3(c)(ii) of this part;
 - (iv) Injection profile survey results as required in Section D paragraph 2(a)(iii) of this part; and
 - (v) ZEI recalculation for each well as required in Section B paragraph 3(c) of this part.
 - (vi) Internal MIT report as required in Section D.2(a)(i) of this part.
 - (vii) A temperature distribution profile/log, according to requirements outlined in Appendix D.
- (f) A narrative description of all non-compliance that occurred during the reporting period.
- (g) Results of all required and proposed subsurface CO₂ monitoring, tracking and imaging methods, as described in paragraph 3(b) of this section. Further, Permittee shall submit updates comparing operational results to predictive models with regard to reservoir and geologic characteristics, and injectate plume behavior and migration.
- (h) Monthly report forms as specified in Appendix C shall be submitted to EPA on the 30th day of the each month. The first monthly report is due on the 30th day of the month during which drilling commences.

Monitoring results and all other reports required by this permit shall be submitted to the following address:

U.S. Environmental Protection Agency, Region IX
Water Division
Ground Water Office (Mail Code WTR-9)
75 Hawthorne St.
San Francisco, CA 94105-3901

F. PLUGGING AND ABANDONMENT

Deleted: Copies of all reports shall also be provided to the following:

California Division of Oil, Gas, and Geothermal Resources
District 6 Office
801 K Street, MS 20-22
Sacramento, CA 95814-3530

California Regional Water Quality Control Board
District 2 Office, San Francisco Bay Region
1515 Clay Street, Suite 1400
Oakland, CA 94612

Solano County Department of Resource Management
675 Texas Street, Suite 5500
Fairfield, CA 94533

1. Notice of Plugging and Abandonment

Permittee shall notify EPA no less than sixty (60) days before conversion, workover, or abandonment of any well authorized by this permit. EPA may require that the plugging and abandonment be witnessed by an EPA representative.

Deleted: The

2. Plugging and Abandonment Plans

The Permittee shall plug and abandon the wells (schematics provided in Appendix F), in accordance with the general Plugging and Abandonment Program submitted as Attachment Q to the application and consistent with CDOGGR requirements and 40 CFR §146.10. EPA reserves the right to change the manner in which a well shall be plugged if the well is modified during its permitted life or if the well is not consistent with EPA requirements for construction or mechanical integrity. EPA may require Permittee to update the estimated plugging cost periodically. Such estimates shall be based upon costs which a third party would incur to plug the wells, including mud and disposal costs, with appropriate contingencies.

Deleted: will

Deleted: the

Permittee shall actively monitor the injected CO₂ plume for at least six months post-injection. Following this period, Permittee has proposed temporary abandonment operations (Appendix F) that shall prevent wells C6-1 and C6-2 from serving as potential flow paths. Permittee may request an extension in temporary abandonment status if justified, as required in paragraph 3 below. Temporary abandonment procedures shall be submitted to EPA for review and approval before implementation.

Deleted: During

Deleted: will

Deleted: must

3. Cessation of Injection Activities

After a cessation of injection and monitoring operations, Permittee shall plug and abandon the inactive well(s) in accordance with the Plugging and Abandonment Plans, unless it:

Deleted: the

- (a) Provides notice to EPA;
- (b) Has demonstrated that the well(s) will be used in the future; and
- (c) Has described actions or procedures, satisfactory to EPA, that will be taken to ensure that the well(s) will not endanger underground sources of drinking water during the period of temporary abandonment.

4. Plugging and Abandonment Report

Within sixty (60) days after plugging any well, Permittee shall submit a report on Form 7520-13, provided in Appendix C, to EPA. The report shall be certified as accurate by the person who performed the plugging operation and shall consist of either:

Deleted: the

- (a) A statement that the well was plugged in accordance with the approved Plugging and Abandonment Plans, or
- (b) Where actual plugging differed from the Plugging and Abandonment Plans, a statement specifying the different procedures followed.

G. FINANCIAL RESPONSIBILITY

1. Demonstration of Financial Responsibility

Permittee is required to demonstrate and maintain financial responsibility and resources sufficient to close, plug, and abandon the underground injection operation as provided in the Plugging and Abandonment Plans and consistent with 40 CFR §144 Subpart G, which the Director has chosen to apply.

Deleted: The

Deleted: D

(a) Permittee shall post a financial instrument such as a surety bond or arrange other financial assurance for each well constructed in the amount of \$1,251,000 per well (total amount for wells C6-1 and C6-2 of \$2,502,000), to guarantee closure. Authority to drill and construct any well shall not be given until the financial instrument has been posted and approved by EPA.

Deleted: The

Deleted: with a standby trust agreement

Deleted: will

(b) The financial responsibility mechanism and amount shall be reviewed and updated periodically, upon request of EPA. Permittee may be required to change to an alternate method of demonstrating financial responsibility. Any such change shall be approved in writing by EPA prior to the change.

Deleted: The

Deleted: must

2. Insolvency of Financial Institution

Permittee shall submit an alternate instrument of financial responsibility acceptable to EPA within sixty (60) days after either of the following events occurs:

Deleted: The

Deleted: must

(a) The institution issuing the bond or financial instrument files for bankruptcy; or

(b) The authority of the trustee institution to act as trustee, or the authority of the institution issuing the financial instrument, is suspended or revoked.

Failure to submit an acceptable financial demonstration shall result in the termination of this permit pursuant to 40 CFR §144.40(a)(1).

Deleted: will

3. Insolvency of Owner or Operator

An owner or operator shall notify EPA by certified mail of the commencement of voluntary or involuntary proceedings under U.S. Code Title 11 (Bankruptcy), naming the owner or operator as debtor, within ten (10) business days. A guarantor of a corporate guarantee shall make such a notification if he/she is named as debtor, as required under the terms of the guarantee.

Deleted: must

Deleted: must

H. DURATION OF PERMIT

This permit and the authorization to inject are issued for a period of up to two (2) years unless terminated under the conditions set forth in Part III, Section B.1 of this permit.

PART III. GENERAL PERMIT CONDITIONS

A. EFFECT OF PERMIT

Permittee is allowed to engage in underground injection well construction, operation and monitoring in accordance with the conditions of this permit. The Permittee shall not construct, operate, maintain, convert, plug, abandon, or conduct any other injection activity in a manner that allows the movement of fluid containing any contaminant (as defined by 40 CFR §144.3) into underground sources of drinking water (as defined 40 CFR §§144.3, 146.3).

Deleted: The

No injection fluids are allowed to migrate to any nearby oilfield production wells that currently exist. Further, this permit requires systematic and predictive documentation over the facility's operational life to ensure that no injection fluids, either presently or in the future, will migrate to oilfield operation production wells.

Furthermore, any underground injection activity not specifically authorized in this permit is prohibited. Permittee shall comply with all applicable provisions of the Safe Drinking Water Act ("SDWA") and 40 CFR Parts 144, 145, 146, and 124. Such compliance does not constitute a defense to any action brought under Section 1431 of the SDWA, 42 U.S.C. § 300(i), or any other common law, statute, or regulation other than Part C of the SDWA. Issuance of this permit does not convey property rights of any sort or any exclusive privilege; nor does it authorize any injury to persons or property, any invasion of other private rights, or any infringement of State or local law or regulations. Nothing in this permit shall be construed to relieve Permittee of any duties under all applicable laws or regulations.

Deleted: The

Deleted: must

Deleted: the

B. PERMIT ACTIONS

1. Modification, Revocation and Reissuance, or Termination

EPA may, for cause or upon request from Permittee, modify, revoke and reissue, or terminate this permit in accordance with 40 CFR §§124.5, 144.12, 144.39, and 144.40. The permit is also subject to minor modifications for cause as specified in 40 CFR §144.41. The filing of a request for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance by the Permittee, does not stay the applicability or enforceability of any permit condition. EPA may also modify, revoke and reissue, or terminate this permit in accordance with any amendments to the SDWA if the amendments have applicability to this permit.

Deleted: the

2. Transfers

This permit is not transferable.

C. **SEVERABILITY**

The provisions of this permit are severable, and if any provision of this permit or the application of any provision of this permit to any circumstance is held invalid, the application of such provision to other circumstances and the remainder of this permit shall not be affected thereby.

D. **CONFIDENTIALITY**

In accordance with 40 CFR §§2 and 144.5, any information submitted to EPA pursuant to this permit may be claimed as confidential by the submitter. Any such claim shall be asserted at the time of submission by stamping the words "confidential business information" on each page containing such information. If a claim is made at the time of submission, EPA may not make the information available to the public or to other organizations without written permission from C6 Resources LLC. If a claim is asserted, the validity of the claim shall be assessed in accordance with the procedures contained in 40 CFR §2 (Public Information). Claims of confidentiality for the following information shall be denied:

Deleted: must

Deleted: no

Deleted: further notice

Deleted: will

Deleted: will

1. Name and address of Permittee, or

Deleted: the

2. Information dealing with the existence, absence, or level of contaminants in drinking water.

E. **GENERAL DUTIES AND REQUIREMENTS**

1. Duty to Comply - Permittee shall comply with all applicable UIC Program regulations and all conditions of this permit, except to the extent and for the duration such noncompliance is authorized by an emergency permit issued in accordance with 40 CFR §144.34. Any permit noncompliance constitutes a violation of the SDWA and is grounds for enforcement action; permit termination, revocation and reissuance, or modification; or denial of a permit renewal application. Such

Deleted: The

noncompliance may also be grounds for enforcement action under the Resource Conservation and Recovery Act ("RCRA").

2. Penalties for Violations of Permit Conditions - Any person who violates a permit requirement is subject to civil penalties, fines, and other enforcement action under the SDWA and may be subject to enforcement actions pursuant to RCRA. Any person who willfully violates a permit condition may be subject to criminal prosecution.
3. Need to Halt or Reduce Activity Not a Defense - It shall not be a defense, for Permittee in an enforcement action, that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.
4. Duty to Mitigate - Permittee shall take all reasonable steps to minimize and correct any adverse impact on the environment resulting from noncompliance with this permit.
5. Proper Operation and Maintenance - Permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by Permittee to achieve compliance with the conditions of this permit. Proper operation and maintenance includes effective performance, adequate funding, adequate operator staffing and training, and adequate laboratory and process controls, including appropriate quality assurance procedures. This provision requires the operation of back-up or auxiliary facilities or similar systems only when necessary to achieve compliance with the conditions of this permit.
6. Property Rights - This permit does not convey any property rights of any sort, or any exclusive privilege.
7. Duty to Provide Information - Permittee shall furnish to EPA, within a time specified, any information which EPA may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with this permit. Permittee shall also furnish to EPA, upon request, copies of records required to be kept by this permit.
8. Inspection and Entry - ~~Subject to receiving 24 hour written notice from EPA, the~~ Permittee shall allow EPA, or an authorized representative, upon the presentation of credentials and other documents as may be required by law, to:
 - (a) Enter upon the Permittee's premises where a regulated facility or activity is located or conducted, or where records are kept under the conditions of this permit;

Deleted: the

Deleted: The

Deleted: The

Deleted: the

Deleted: The

Deleted: The

Deleted: -

Deleted: The

- (b) Have access to and copy, at reasonable times, any records that are kept under the conditions of this permit;
- (c) Inspect and photograph at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this permit; and
- (d) Sample or monitor at reasonable times, for the purposes of assuring permit compliance or as otherwise authorized by the SDWA, any substances or parameters at any location. In the event that samples are taken, EPA shall provide split samples to Permittee.

9. Signatory Requirements - All applications, reports, or other information submitted to EPA shall be signed and certified by a responsible corporate officer or duly authorized representative according to 40 CFR §§122.22 and 144.32.

10. Additional Reporting

(a) Planned Changes - Permittee shall give advance notice to EPA as soon as possible of any planned physical alterations or additions to the permitted facility.

Deleted: The

(b) Anticipated Noncompliance - Permittee shall give notice as soon as possible to EPA of any planned changes in the permitted facility or activity which may result in noncompliance with permit requirements.

Deleted: The

Deleted: advance

(c) Compliance Schedules - Reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any compliance schedule of this permit shall be submitted to EPA no later than thirty (30) days following each schedule date.

(d) Twenty-four Hour Reporting

(i) Permittee shall report to EPA any noncompliance which may endanger health or the environment. Information shall be provided orally within twenty-four (24) hours from the time Permittee becomes aware of the circumstances. The following information shall be reported orally within twenty-four (24) hours:

Deleted: The

Deleted: the

Deleted: must

(1) Any monitoring or other information which indicates that any contaminant may cause an endangerment to an underground source of drinking water; and

(2) Any noncompliance with a permit condition, or malfunction of the injection system, which may cause fluid migration into

or between underground sources of drinking water; and

- (ii) A written submission of all noncompliance as described in paragraph (c)(i) shall also be provided to EPA within five (5) days of the time Permittee becomes aware of the circumstances. The written submission shall contain a description of the noncompliance and its cause; the period of noncompliance, including exact dates and times; if the noncompliance has not been corrected, the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate, and prevent recurrence of the noncompliance.

Deleted: the

- (e) Other Noncompliance - At the time monitoring reports are submitted, Permittee shall report in writing all other instances of noncompliance not otherwise reported. Permittee shall submit the information listed in Part III, Section E.10(c) of this permit.

Deleted: the

Deleted: The

- (f) Other Information - If Permittee becomes aware that it failed to submit all relevant facts in the permit application, or submitted incorrect information in the permit application or in any report to EPA, Permittee shall submit such facts or information within two (2) weeks of the time such facts or information becomes known.

Deleted: the

Deleted: the

11. Continuation of Expiring Permit

- (a) Duty to Reapply - If Permittee wishes to continue an activity regulated by this permit after the expiration date of this permit, Permittee shall submit a complete application for a new permit.

Deleted: the

Deleted: the

Deleted: must

- (b) Permit Extensions - The conditions and requirements of an expired permit continue in force and effect in accordance with 5 U.S.C. §558(c) until the effective date of a new permit, if:

- (i) Permittee has submitted a timely and complete application for a new permit; and

Deleted: The

- (ii) EPA, through no fault of Permittee, does not issue a new permit with an effective date on or before the expiration date of the previous permit.

Deleted: the

|

APPENDIX A - Project Maps

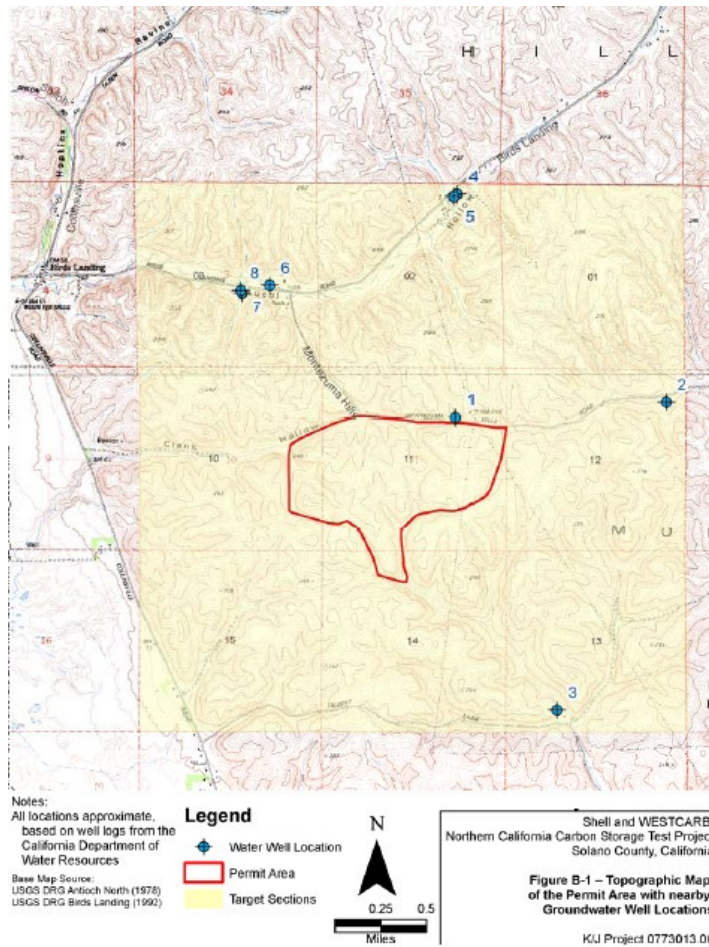


Figure 1. Topographic map of the permit area with nearby groundwater well locations (from Attachment B of the Permit Application).

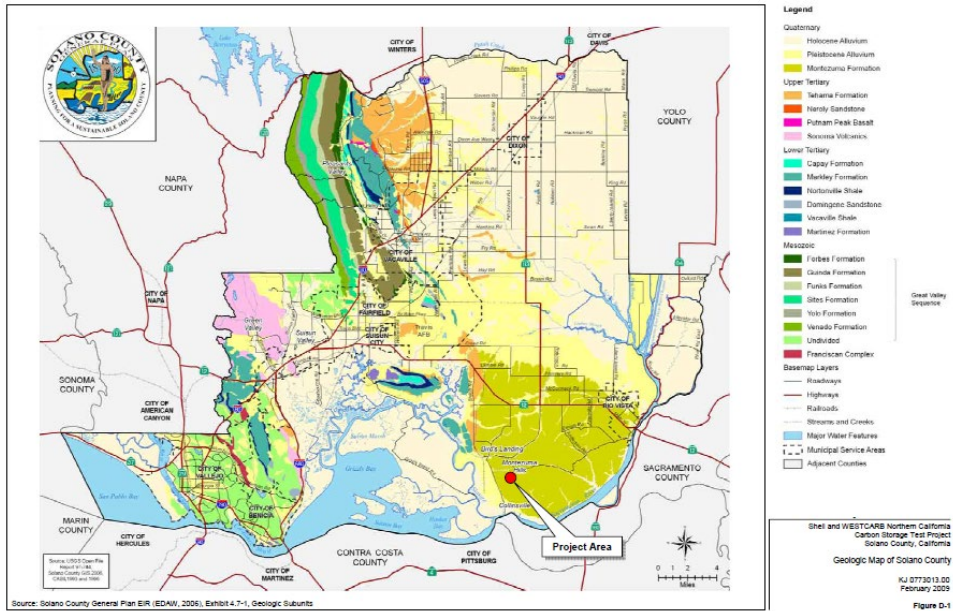


Figure 2. Geologic map of Solano County with Project Area highlighted (from Attachment D of the Permit Application).


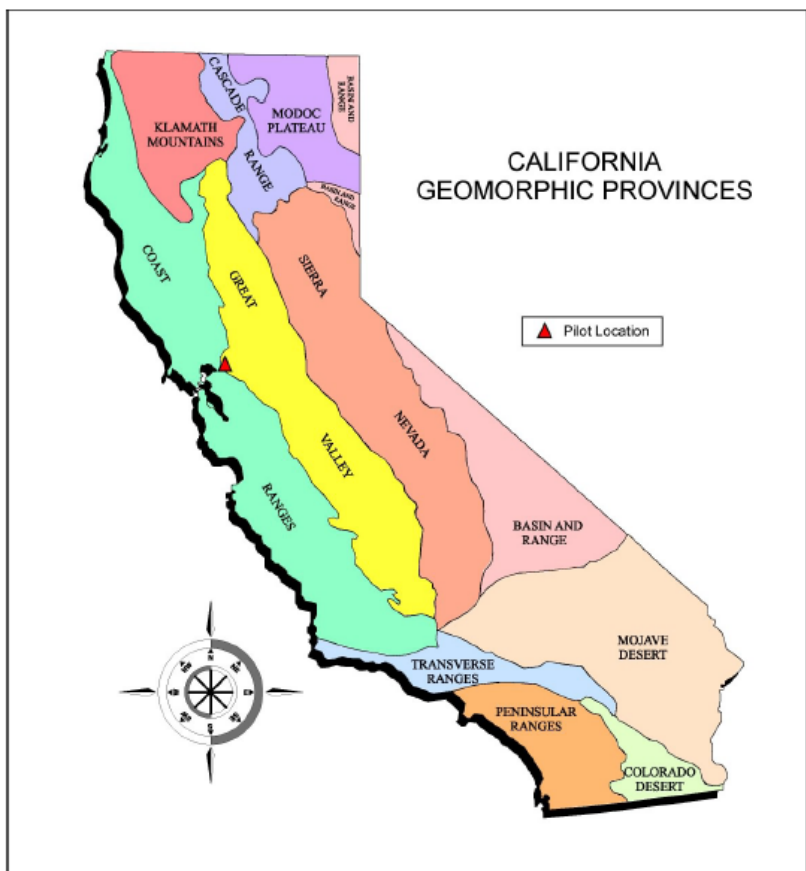


Figure 3. California geomorphic provinces with Pilot Location highlighted (from Attachment F of the Permit Application).

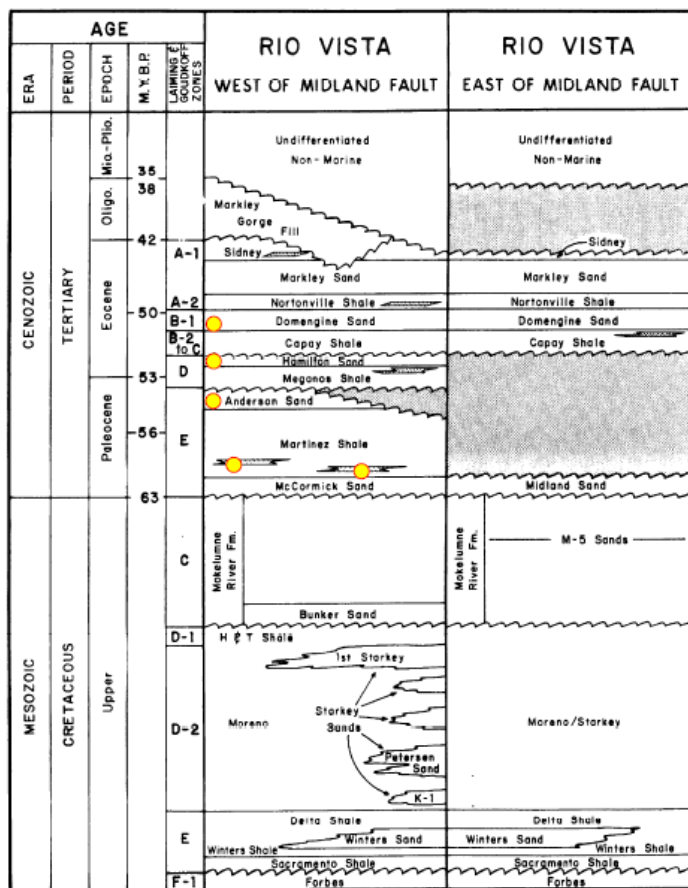

● Potential Injection Zone Sands

Figure 4. Stratigraphic column for the Rio Vista Field showing potential injection zone sand formations (from Attachment F of the Permit Application).

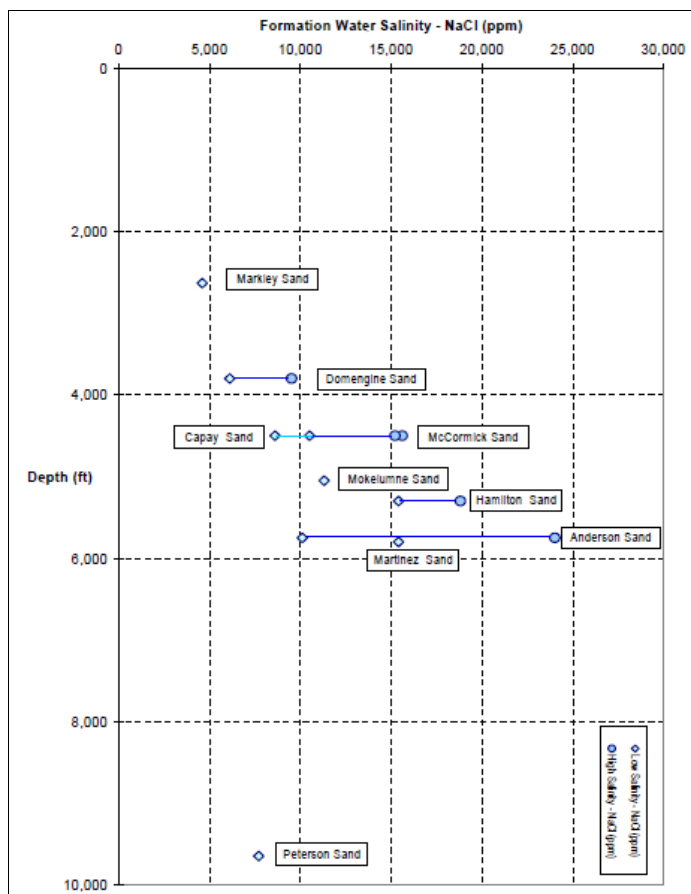


Figure 5. Produced water salinity (NaCl, ppm) in the Rio Vista Field (from Attachment D of the permit application).

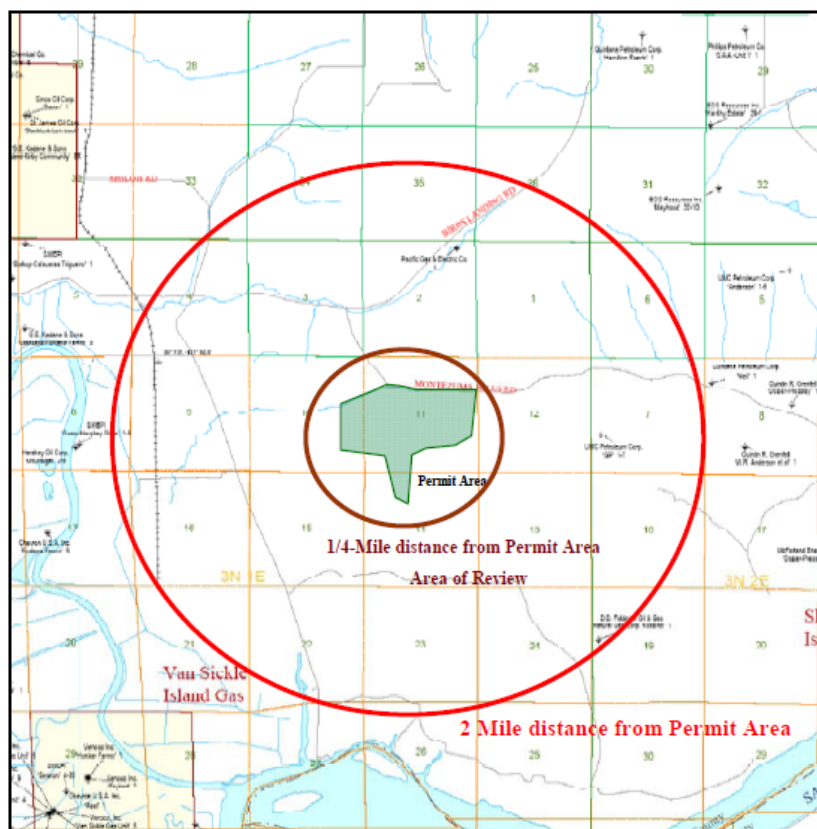


Figure 6. Portion of State of California, Division of Oil, Gas, and Geothermal Resources Map 612 showing Project Area and nearby wells. The three closest wells, “Nat Gas Corp Robbins 11,” “1-7 Grandpa Peter,” and “Birds Landing 1” are 8,000, 11,800, and 15,400 feet away from the proposed injection area respectively (from Attachment B of the Permit Application).

APPENDIX B – Well Schematics

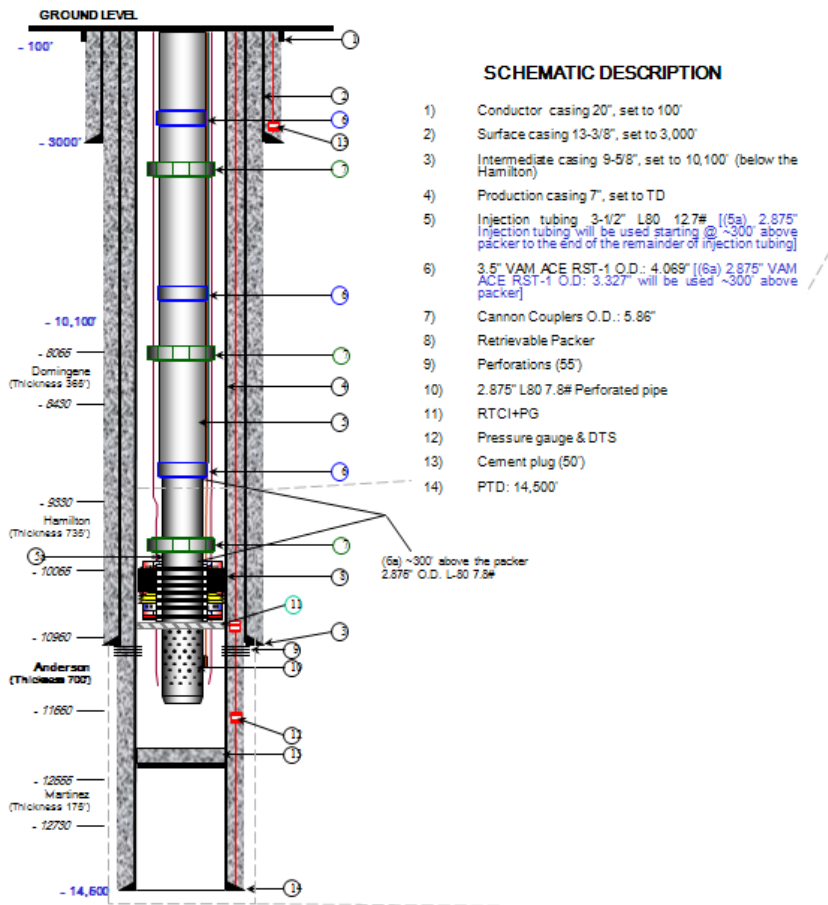


Figure 1. Proposed construction specifications for injection well C6-1.


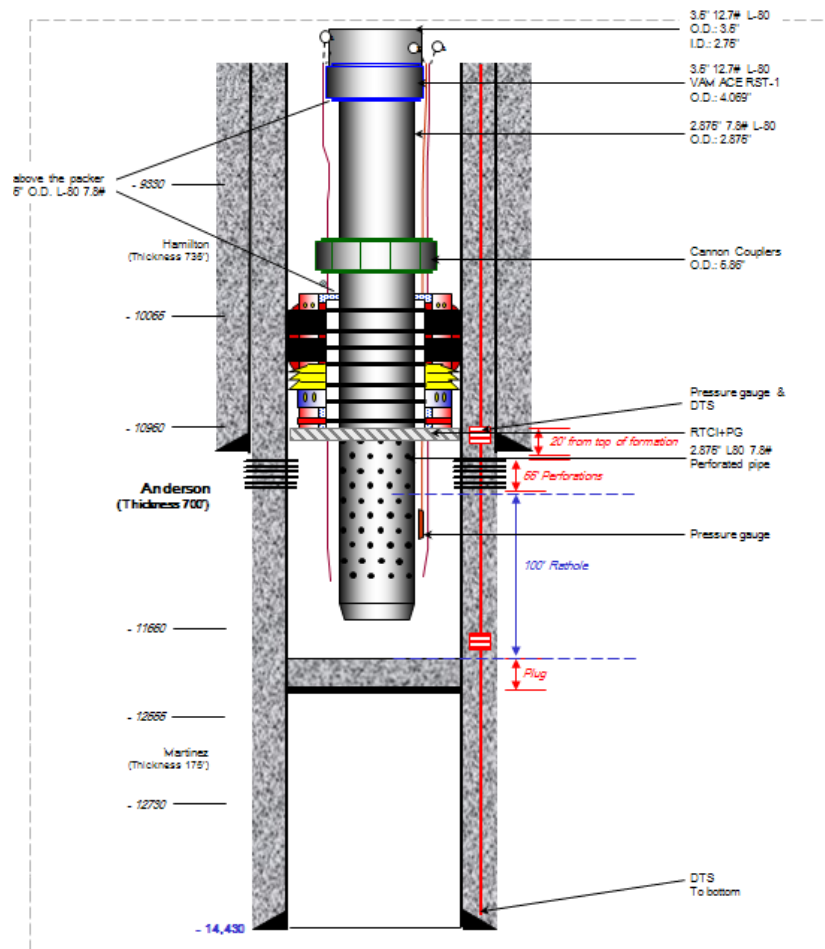


Figure 2. Detail of injection well C6-1 assuming an Anderson Formation completion.

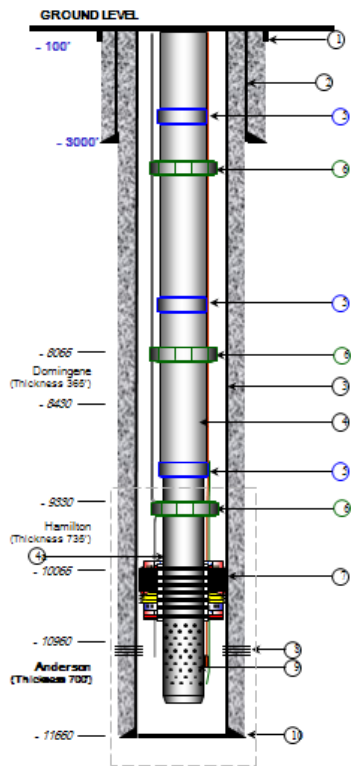

SCHEMATIC DESCRIPTION

- 1) Conductor casing 20", set to 100'
- 2) Surface casing 13-3/8", set to 3,000'
- 3) Production casing 7", set to TD
- 4) Injection tubing 3-1/2" L80 12.7# [(4a) 2.875"
Injection tubing will be used starting @ ~300' above
packer to the end of the remainder of injection tubing
- 5) 2.875" VAM ACE RST-1 O.D. 2.875" I.D. 2.259"
- 6) Cannon Couplers O.D.: 5.86"
- 7) Retrievable Packer
- 8) Perforations (55')
- 9) 2.875" L80 7.8# Perforated pipe
- 10) PTD: 11,660

Figure 3. Proposed construction specifications for monitoring well C6-2.

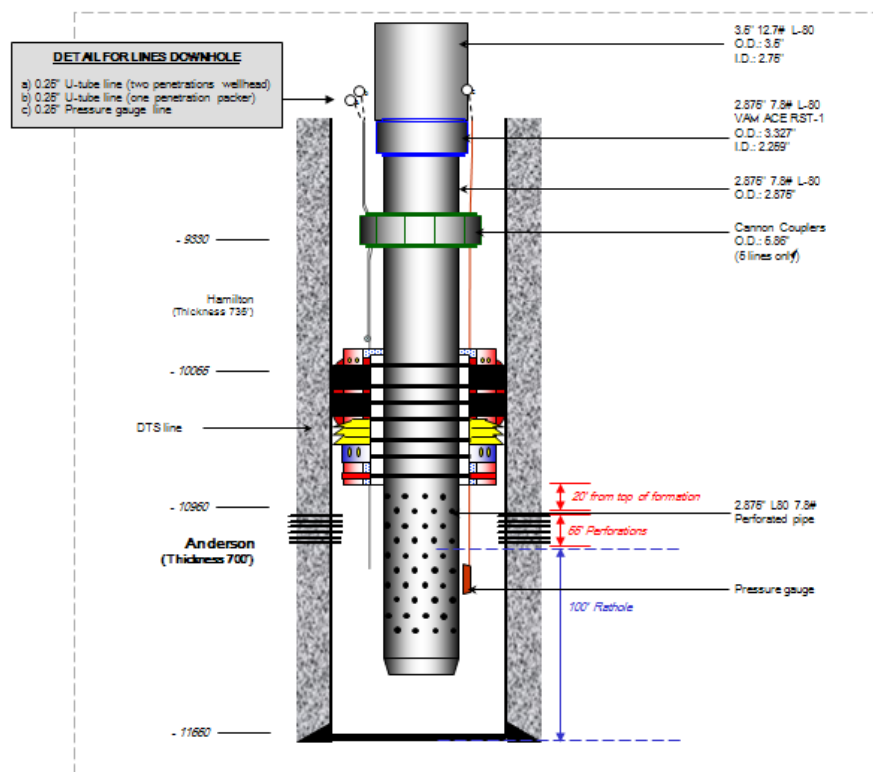


Figure 4. Detail of monitoring well C6-2 assuming an Anderson Formation completion.

APPENDIX C – EPA Reporting Forms

Form 7520-7: Application to Transfer Permit

Form 7520-9: Completion of Construction

Form 7520-11: Annual Well Monitoring Report

Form 7520-12: Well Rework Record

Form 7520-14: Plugging and Abandonment Plan

APPENDIX D – Region 9 Temperature Logging Requirements

A temperature distribution profile/log shall be constructed using data gathered by fiber optic cables over the entire depth of the well. The Permittee shall send the electronic version(s) immediately when due/generated via e-mail for EPA approval and possible discussion with the operator. The operator shall adhere to the following requirements in preparing and submitting their temperature logs on a monthly basis (see paragraph E.5.(c).(7). of Part II):

Deleted: will

Deleted: must

Deleted: must

(1) With the printed (or electronically generated) log, provide the raw data for the logging run intervals that have been captured.

(2) The heading on the log shall be complete and include all the pertinent information, such as correct well name, location, elevations, total shut-in times between logging runs (data capture), etc.

(3) The vertical depth scale of the log should be 1 inch per 100 ft. and match the lithology log track (see (6)). The horizontal temperature scale should be one Fahrenheit degree per inch spacing.

(4) The right hand tracks shall contain the "absolute" temperature and the "differential" temperature curves with both log runs identified and clearly superimposed for comparison and interpretation purposes.

Deleted: must

(5) The left hand tracks shall correlate with the temperature log (matching the correct depth intervals) and contain:

Deleted: must

- a) a collar locator log,
- b) a lithology log such as a copy of the original electric or induction (open-hole) log for correlation purposes.

(6) The left hand or right hand track, whichever is more appropriate, should identify the geologic zones of interest, especially the base of the USDWs (underground sources of drinking water) if known, as well as the target injection zone, the overlying confining zone and other pre-determined geologic formations of interest that were discussed in the permit.

APPENDIX E - Region 9 UIC Pressure Falloff Requirements

For reference please refer to:

<http://www.epa.gov/region09/water/groundwater/uic-docs/falloff-testing-guidelines.pdf>

APPENDIX F - Plugging and Abandonment Plans

Upon completion of injection activities the well(s) shall be abandoned according to State and Federal regulations to ensure protection of Underground Sources of Drinking Water.

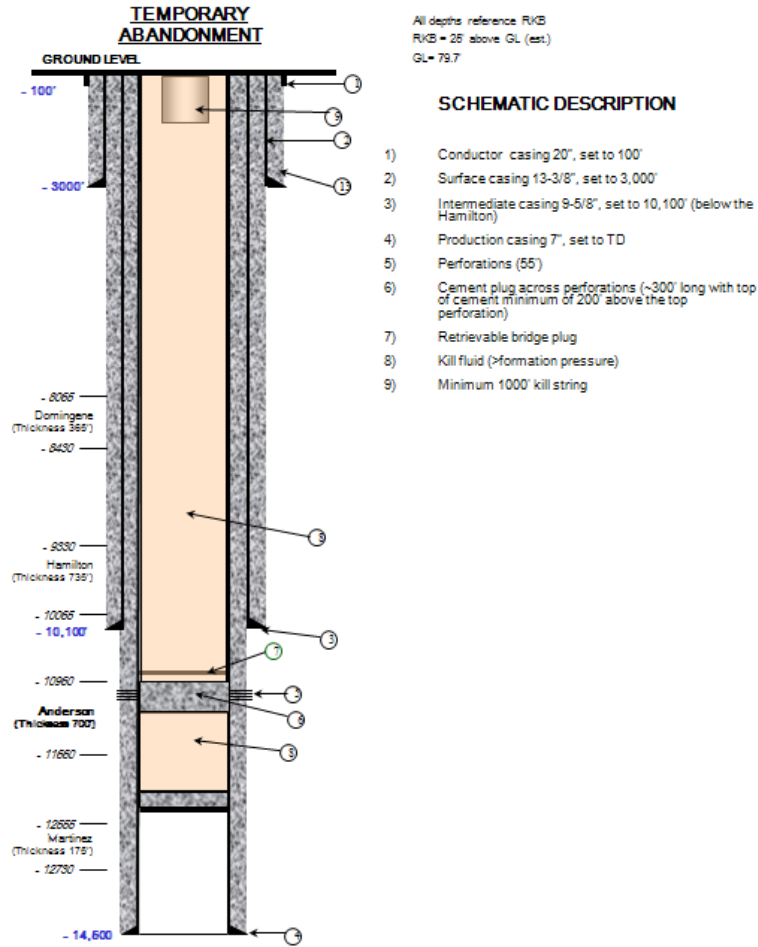


Figure 1. Temporary Plugging and Abandonment plan schematic for wells C6-1 and C6-2.

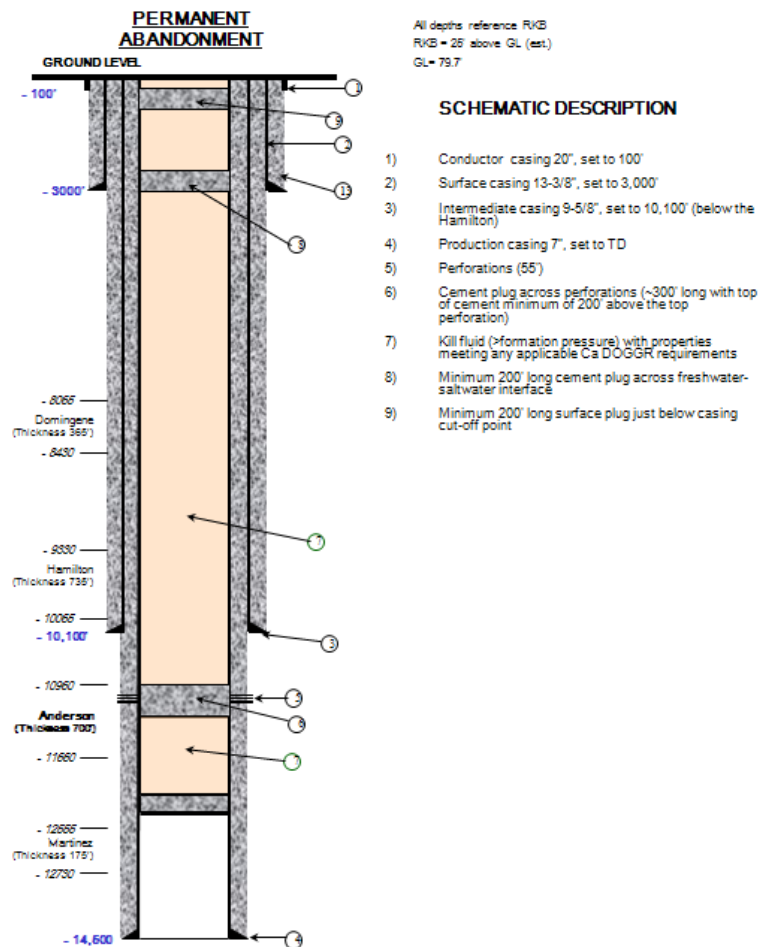


Figure 2. Permanent Plugging and Abandonment plan schematic for wells C6-1 and C6-2.

**APPENDIX G –
REGION 9 Step Rate Test Policy**

For reference please refer to:

Society of Petroleum Engineers (SPE) Paper #16798, Systematic Design and Analysis of Step-Rate Tests To Determine Formation Parting Pressure (This paper may be obtained from the SPE.)

APPENDIX H – CO₂ Specifications and Potential Tracers

Component	Standard
Purity	95% v/v min.
Moisture	30 pounds of water per mmcf
Oxygen	10 ppm by weight, max.
Nitrogen	4 mole %
Hydrocarbons	5 mole %
Total sulfur content	35 ppm by weight, max.
Hydrogen Sulfide	20 ppm by weight, max.

* From Kinder Morgan

** ppm = parts per million

Table 1. Typical commercial grade CO₂ specifications (from Attachment P of the Permit Application).

Tracer	Concentration (injectate)	Concentration (produced fluids)	Maximum Expected Total Weight	Comments
FLUTEC-TG PMCH (perfluoromethylcyclohexane)	30 ug/mL (30 ppm)	1 ng/mL (1 ppb)	Maximum total Perfluoro-carbons: 60 kg.	No known human-or eco-toxicity
FLUTEC-TG PTMCH (perfluoro-1,3,5-trimethylcyclohexane)	30 ug/mL (30 ppm)	1 ng/mL (1 ppb)	Maximum total Perfluoro-carbons: 60 kg.	No known human-or eco-toxicity
FLUTEC-TG o-PDMCH (perfluoro-1,2-dimethylcyclohexane)	30 ug/mL (30 ppm)	1 ng/mL (1 ppb)	Maximum total Perfluoro-carbons: 60 kg.	No known human-or eco-toxicity
FLUTEC-TG m-PDMCH (perfluoro-1,3-dimethylcyclohexane)	7 ug/mL (7 ppm)	0.2 ug/mL (0.2 ppb)	Maximum total Perfluoro-carbons: 60 kg.	No known human-or eco-toxicity
FLUTEC-TG p-PDMCH (perfluoro-1,4-dimethylcyclohexane)	7 ug/mL (7 ppm)	0.2 ug/mL (0.2 ppb)	Maximum total Perfluoro-carbons: 60 kg.	No known human-or eco-toxicity
FLUTEC-TG PMCP (perfluoromethylcyclopentane)	30 ug/mL (30 ppm)	1 ng/mL (1 ppb)	Maximum total Perfluoro-carbons: 60 kg.	No known human-or eco-toxicity
FLUTEC-TG PDMCB (perfluorodimethylcyclobutane)	7 ug/mL (7 ppm)	0.2 ug/mL (0.2 ppb)	Maximum total Perfluoro-carbons: 60 kg.	No known human-or eco-toxicity
FLUTEC-TG PECH (perfluoroethylcyclohexane)	7 ug/mL (7 ppm)	0.2 ug/mL (0.2 ppb)	Maximum total Perfluoro-carbons: 60 kg.	No known human-or eco-toxicity
²⁰ Ne (Neon 20)	30.3 ppm	Variable	0.63 kg	No known human-or eco-toxicity
³⁶ Ar (Argon 36)	164 ppm	Variable	3.42 kg	No known human-or eco-toxicity
⁸⁴ Kr (Krypton 84)	7.64 ppm	Variable	0.16 kg	No known human-or eco-toxicity
¹³² Xe (Xenon 132)	0.4 ppm	Variable	0.01 kg	No known human-or eco-toxicity
Fluorescein and/or Eosin	1 ppm	5 ppb	10kg	No known human- or eco-toxicity

*ppm = parts per million, ppb = parts per billion

Table 2. Potential tracers used during injection and well testing (from Attachment P of the Permit Application).

|

↓

Deleted: APPENDIX I: OPERATIONS TIMELINE¶
¶
[TO BE INSERTED HERE BY C6 RESOURCES, LLC ¶
<object>DURING DRAFT PERMIT REVIEW